
Bernù Aero



 To remove the back cushion, unscrew the bottom 1/4-20 JCB on the seat bracket. Repeat process on the adjacent seat bracket

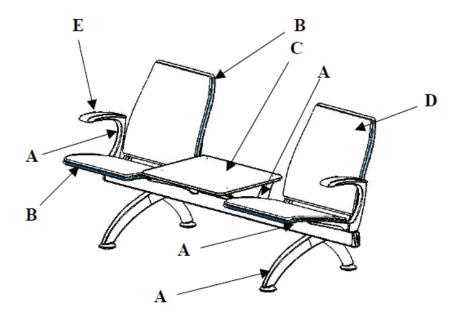

- A Cast aluminum parts have to be cleaned with non-abrasive cleaners. It is recommended to use Windex.
- B Powder coated parts have to be cleaned with non-abrasive cleaners. It is recommended to use Windex.
- C Table tops have to be cleaned with non-abrasive cleaners. Soapy water or ammonia-based cleaners will remove most dirt and stains.
- D Fabric follow the manufacturer's cleaning instructions for the selected upholstery
- E Arm Caps clean with non-abrasive cleaners. Soapy water of ammonia-based cleaners will remove most dirt and stains.
- F All screws on the seats and the underside of the beam should be checked on a bi-annual basis (every 6 months) and tightened if loose. Loose parts may be hazardous to the users.
- G In case of paint damage, take following steps for touch-up:
 - Take 5 tablespoons of provided paint powder and put it into a smaller container
 - Pour some lacquer thinner (from any hardware store) a drop at a time over the paint powder and mix thoroughly.
 - Make sure paint mixture is at a good consistency, not too thick, not too thin
 - Apply paint with an artist brush
 - Let it dry 24 hours

HAVE A QUALITY CHECK AFTER YOU HAVE FINISHED.

/1 BERNÙ MAINTENANCE

ARCONAS

Head Office

Arconas Corporation 5700 Keaton Crescen Mississauga, Ontario L5R 3H5 Canada

United States

Arconas Inc. 220 S. Elm Street High Point, N. Carolina 27260 U.S.A.

Contact

Toll Free: +1 800 387 9496 Email: info@arconas.com

- f /arconas
- @ @arconascorp
- in /arconas



Platinum member

ISO 9001:2015 & ISO 14001:2015 Certifiec

