


Grade A | Esprit


by Nassimi

Standard Vinyl


Our Grade A material is a standard vinyl known for its flexibility and strength. It offers a sleek appearance, a large color selection and is easy to clean and maintain.

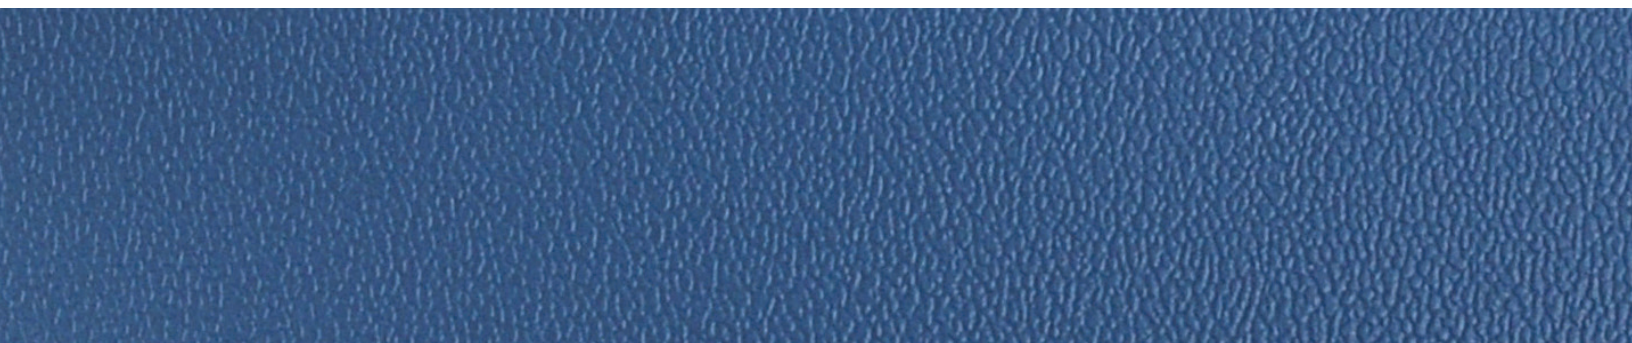

Grade A | Esprit



Super White



Snow White




Adobe White



Alabaster



Flint Grey



Dove



Platinum



Gun Metal



Graphite



Blue Ridge



Imperial Blue




Blueberry




Royal



Marina




Space Blue



Colonial Blue




Regimental Blue



Ocean Grey




Aqua Dark



Aegean



Aqua Green



Grotto




Forest




Emerald




Yew Green



Vizcaya Palm



Teal




Celadonw

Grade A | Esprit




Dusty Jade




North Woods



Irish Spring



Olive Green



Artichoke



Green Tea



Taupe



Tea Leaf




Mocha



Chestnut



Espresso




Black



Burgundy



Concord



New Purple



Purple Iris



Grape



Plum



Wood Violet



Iris



Blush



Mauve White



Tea Rose



Sangria



Candy Apple



Wineberry



Deep Clay



Claret

Grade A | Esprit




Raspberry




Paprika



American Beauty



Tomato




Mandarin Orange




British Tan



Rose




Peach



Pink



Shell




Toast



Parchment



Doe



Sun Yellow



Goldenrod



Saddle Tan



Oak



Dewberry

Grade A | Esprit

Information

GENERAL SPECIFICATIONS

Surface composition	100% PVC
Substrate composition	100% Polyester
Weight	30 oz per linear yard
Width	54"
Thickness	0.97 mm

ADDED PERFORMANCE SPECIFICATIONS

Stain resistance	Yes
Colorfastness to uv	1,000 Hours
Bleach resistance	Yes, 10% Dilution
Mildew resistant	Pass
Cold crack	-20° F
Sulfide stain resistance	Yes

PHYSICAL PERFORMANCE SPECIFICATIONS

Abrasion resistance	250,000+ Double Rubs
Breaking strength	95 Warp, 73 Fill
Crocking resistance	5 Dry, 5 Wet
Flex resistance	25,000+
Tear strength: tongue tear	11.9 Warp, 15.4 Fill
Seam strength: tack tear	67 Warp, 43 Fill

FLAME RETARDANCY SPECIFICATIONS

California Technical Bulletin 117:2013	PASS
UFAC Class I	PASS
NFPA 260	PASS

REDUCED ENVIRONMENTAL IMPACT

- This product does not pose any exposure risks associated with the chemicals in prop 65 no added flame retardant chemicals - ab2998 compliant
- No added anti-bacterial chemicals 7p phthalate free
- Lead / heavy metal free
- Bpa free / PFAS free / tris free / formaldehyde free does not contain conflict minerals

CLEANING AND MAINTENANCE

- For light soiling, clean the soiled area with mild soap and water, then rinse with fresh water and wipe down with a clean cloth.
- For heavy soiling, clean the soiled area with a 50% solution of Isopropyl Alcohol and water. It is important to rinse the cleaned area with fresh water after applying the alcohol solution.
- For food stains or oil, Wipe affected area with a soft cloth or soft bristle brush using a none abrasive cleaner, for example Formula 409 or Fantastik. Rinse with fresh water and wipe dry.
- For healthcare and disinfection, Clean the soiled area with a 10% solution of Household Bleach and water. It is important to rinse the cleaned area with fresh water after applying the bleach solution.

NOTE: Test on a hidden area before applying to the stain.
DO NOT USE WITH ALCOHOL-BASED CLEANING AGENTS